



# ENCLOSED "H" SERIES DIESEL GENERATORS

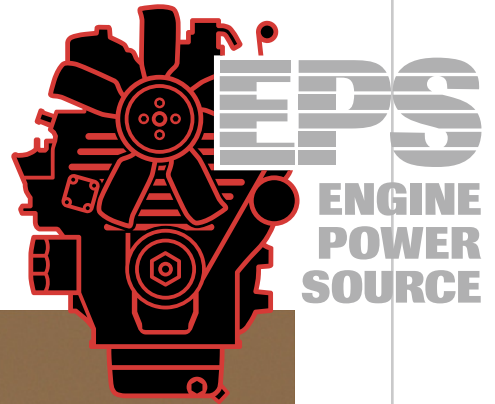


- ▶ *30KW, 40KW & 45KW Models Available*
- ▶ *Compact Modular Design, Optimized for Mobile Applications*
- ▶ *One-Side, Full-Access Service*
- ▶ *Multiple Mounting Options*
- ▶ *Low Vibration Engine Isolation System*
- ▶ *Labyrinth Air Channeling Helps Reduce Dirt Accumulation and Noise*
- ▶ *Powered by a Tough Kubota Diesel Engine*

**TOUGH**  
**Kubota**  
**STUFF**

# Setting a New Standard for Mobile Generators



Compact modular design has been optimized to handle the demands of a wide range of mobile applications

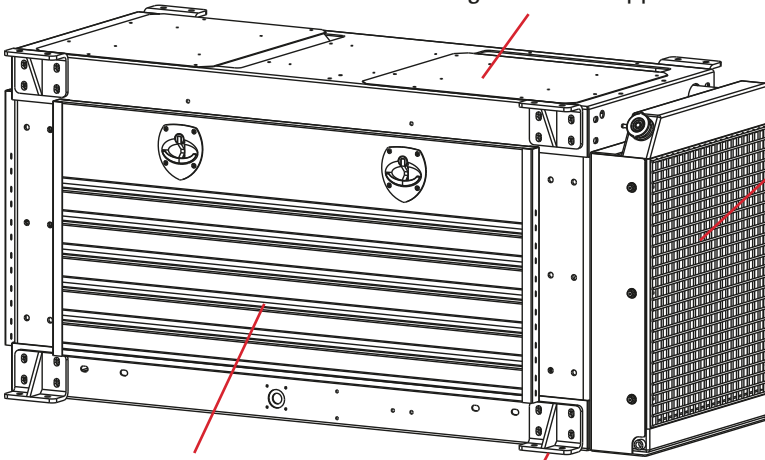


Convenient single-side service with full access to engine maintenance parts

On-board or remote radiator options for maximum installation flexibility

Unit can be base mounted or hung (ideal for trucks or trailers)

- ✓ Low vibration engine isolation system for smooth and quiet operation
- ✓ Two-step powder coat painting process helps reduce corrosion
- ✓ Rugged construction top-to-bottom for dependable service and a long life

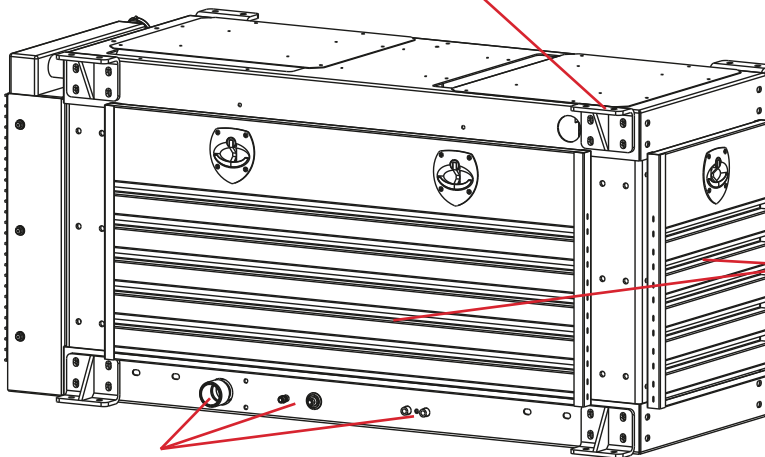

Easy installation hook-ups for exhaust, battery and fuel (left to right)

Labyrinth air channeling helps reduce dirt accumulation and operating noise

## Specifications

EPS Model Number	10030-HENC	10040-HENC	10045-HENC
KW (Stand-by)	30.2	39.0	45.0
KW (Continuous)	26.5	34.1	40.7
120 / 240V (Single Phase Continuous Amps)	220 / 110	284 / 142	339 / 169
Engine	Kubota V3300 BG	Kubota V3600 T BG	Kubota V3800 DI T BG
Fuel Consumption (US Gal./hr.) @ 25% / 50% / 100% Load	0.58 / 1.16 / 2.33	0.75 / 1.50 / 3.00	0.85 / 1.70 / 3.40
Length (inches)	70.24	70.24	70.24
Width (inches)	28.75	28.75	28.75
Height (inches)	32.75	32.75	32.75
Weight (including oil & antifreeze)	1700 lbs.	1740 lbs.	1765 lbs.

All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. © 2009, Engine Power Source.

**Charlotte, NC Area**  
348 Bryant Blvd.  
Rock Hill, SC 29732  
704-944-1999

Toll-Free: 800-374-7522

[www.enginepowersource.com](http://www.enginepowersource.com)